

TW**Application and Description**

The TW conductor is suitable for most current wiring solutions for residential, commercial and industrial environments. It is used in branch circuits for permanent installations. TW conductors in sizes 14 AWG to 8 AWG can be installed in conduits and other raceways. The temperature of installation shall not exceed 60° C.

Standard and Approval

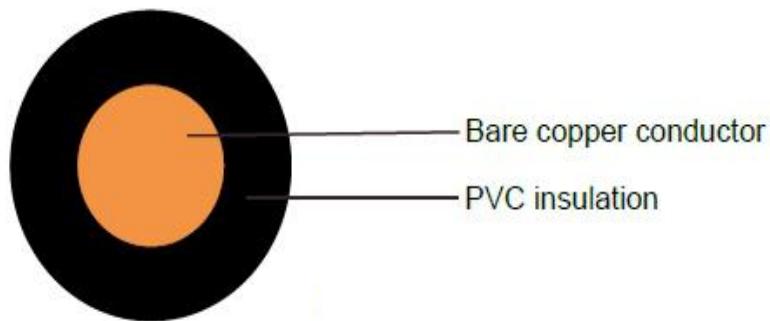
- ASTM B3, B8
- UL 83 - Thermoplastic-Insulated Wires and Cables
- UL 1581 - Electrical Wires, Cables and Flexible Cords

Cable Construction

Conductor: Bare annealed copper conductor, solid or stranded

Insulation: PVC 60° C insulation

Color: upon request, black is preferable

**Cable Parameter**

AWG or kcmil	Strand	Nominal Insulation		Nominal Overall		Cable	
		Thickness Inch/mm	Inch/mm	Diameter Inch/mm	Inch/mm	Weight Lbs/kft kg/km	Weight kg/km
14	1	0.030	0.76	0.138	3.5	19	28
12	1	0.030	0.76	0.154	3.9	27	40
10	1	0.030	0.76	0.177	4.5	40	60
8	1	0.045	1.14	0.240	6.1	67	100
14	7	0.030	0.76	0.146	3.7	19	29
12	7	0.030	0.76	0.165	4.2	29	43
10	7	0.030	0.76	0.193	4.9	44	65
8	7	0.045	1.14	0.260	6.6	72	107