

(N)TSCGEWUEU Medium-Voltage Fixed Installation Cable Without

Fibre Optics


Applications

These cables are used for laying alongside the conveyor belts (also for shiftable units) and on material handling equipment (even with continuous movements such as in cable booms or as connection between upper and lower car) and for connection of submersible pump units.

Standards

Based on VDE 0250 Part 813

Construction

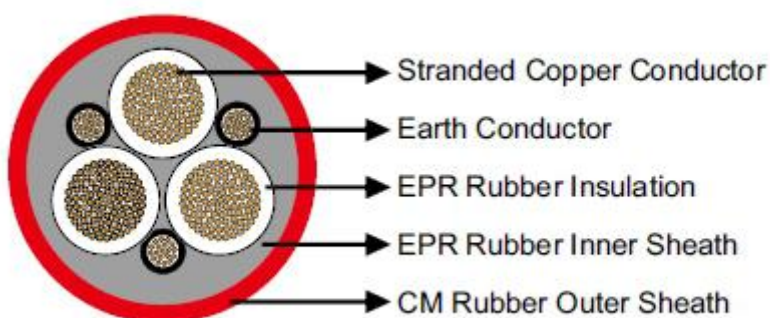

Conductors: Flexible stranded copper conductor, class 5 according to DIN VDE 0295.

Inner Conductor Layer: Semiconductive layer.

Insulation: EPR.

Outer Conductor Layer: Semiconductive layer.

Earth Conductor: Split into three in the outer interstices.

Inner Sheath: EPR.

Outer Sheath: CM.

Dimensions and Weight

3.6/6 kV

Number of Cores × Nominal Cross Section	Minimum Overall Diameter	Maximum Overall Diameter	Nominal Weight
No. × mm ²	mm	mm	kg/km
3×25+3×25/3	36.7	39.7	2320
3×25+3×50/3	40.6	43.6	2860
3×35+3×25/3	40.5	43.5	2860
3×35+3×50/3	42.3	45.3	3220
3×50+3×25/3	43.8	46.8	3500
3×50+3×50/3	43.8	46.8	3650
3×70+3×35/3	47.0	50.0	4360
3×70+3×50/3	49.7	53.7	5010

3×95+3×50/3	52.2	56.2	5550
3×120+3×70/3	55.9	59.9	6690
3×150+3×70/3	61.0	65.0	8030
3×185+3×95/3	64.0	68.0	9320
3×240+3×120/3	72.1	76.1	11960
3×300+3×150/3	77.3	81.3	14260

6/10 kV

Number of Cores×Nominal Cross Section	Minimum Overall Diameter	Maximum Overall Diameter	Nominal Weight
No. x mm ²	mm	mm	kg/km
3×25+3×25/3	39.0	42.0	2520
3×25+3×50/3	41.4	44.4	2930
3×35+3×25/3	41.8	44.8	2980
3×35+3×50/3	43.6	46.6	3350
3×50+3×25/3	45.1	48.1	3640
3×50+3×50/3	45.1	48.1	3780
3×70+3×35/3	48.3	51.3	4500
3×70+3×50/3	48.3	51.3	4730
3×95+3×50/3	53.5	57.5	5710
3×120+3×70/3	57.2	61.2	6860
3×150+3×70/3	62.3	66.3	8210
3×185+3×95/3	65.3	69.3	9510
3×240+3×120/3	73.4	77.4	12170
3×300+3×150/3	78.6	82.6	14500

8.7/15 kV

Number of Cores×Nominal Cross Section	Minimum Overall Diameter	Maximum Overall Diameter	Nominal Weight
No. x mm ²	mm	mm	kg/km
3×25+3×25/3	42.5	45.5	2850
3×25+3×50/3	44.2	47.2	3210
3×35+3×25/3	45.3	48.3	3340
3×35+3×50/3	45.3	48.3	3480
3×50+3×25/3	49.4	53.4	4180
3×50+3×50/3	49.4	53.4	4320
3×70+3×35/3	52.7	56.7	5090
3×70+3×50/3	52.7	56.7	5310
3×95+3×50/3	57.0	61.0	6160

3×120+3×70/3	62.1	66.1	7550
3×150+3×70/3	65.7	69.7	8710
3×185+3×95/3	68.7	72.7	10020
3×240+3×120/3	76.8	80.8	12750
3×300+3×150/3	82.0	86.0	15110

12/20 kV

Number of Cores×Nominal Cross Section	Minimum Overall Diameter	Maximum Overall Diameter	Nominal Weight
No. × mm ²	mm	mm	kg/km
3×25+3×25/3	45.5	48.5	3150
3×25+3×50/3	45.5	48.5	3300
3×35+3×25/3	48.3	51.3	3660
3×35+3×50/3	48.3	51.3	3800
3×50+3×25/3	52.5	56.5	4540
3×50+3×50/3	52.5	56.5	4680
3×70+3×35/3	55.7	59.7	5460
3×70+3×50/3	55.7	59.7	5690
3×95+3×50/3	61.4	65.4	6770
3×120+3×70/3	65.1	69.1	7980
3×150+3×70/3	68.7	72.7	9170
3×185+3×95/3	73.2	77.2	10780
3×240+3×120/3	79.8	83.8	13280
3×300+3×150/3	86.3	91.3	16070

14/25 kV

Number of Cores×Nominal Cross Section	Minimum Overall Diameter	Maximum Overall Diameter	Nominal Weight
No. × mm ²	mm	mm	kg/km
3×25+3×25/3	50.3	54.3	3750
3×25+3×50/3	50.3	54.3	3900
3×35+3×25/3	53.1	57.1	4290
3×35+3×50/3	53.1	57.1	4430
3×50+3×25/3	56.3	60.3	5020
3×50+3×50/3	56.3	60.3	5160
3×70+3×35/3	61.0	65.0	6190
3×70+3×50/3	61.0	65.0	6410
3×95+3×50/3	65.3	69.3	7340
3×120+3×70/3	69.0	73.0	8580

3×150+3×70/3	74.0	78.0	10050
3×185+3×95/3	77.0	81.0	11430
3×240+3×120/3	85.0	90.0	14400
3×300+3×150/3	90.2	95.2	16860

18/30kV

Number of Cores×Nominal Cross Section	Minimum Overall Diameter	Maximum Overall Diameter	Nominal Weight
No. × mm ²	mm	mm	kg/km
3×25+3×25/3	53.7	57.7	4160
3×25+3×50/3	53.7	57.7	4300
3×35+3×25/3	56.6	60.6	4730
3×35+3×50/3	56.6	60.6	4870
3×50+3×25/3	61.2	65.2	5700
3×50+3×50/3	61.2	65.2	5840
3×70+3×35/3	64.4	68.4	6680
3×70+3×50/3	64.4	68.4	6900
3×95+3×50/3	68.7	72.7	7860
3×120+3×70/3	73.8	77.8	9390
3×150+3×70/3	77.5	81.5	10660
3×185+3×95/3	80.5	84.5	12060
3×240+3×120/3	88.5	93.5	15090
3×300+3×150/3	94.7	99.7	17820